


Como ordenar


JS	R	32	X	50	B	LB	TD-A93	2
Series	Magnético	Diám.		Carrera	Rosca final de varilla	Tipo de montaje	Tipo de sensor	Cantidad de sensor
MSS retorno de resorte de simple efecto 		Ø12 Ø16 Ø20 Ø25 Ø32 Ø40 Ø50 Ø63 Ø80 Ø100		5~50mm 5~50mm 5~100mm 5~100mm 5~100mm 10~100mm 10~100mm 10~100mm 10~100mm		Foot bracket  Front flange  Rear flange  Double clevis  CB	TD-A93 TD-M9N TD-M9P  TD-A93V TD-M9NV TD-M9PV  TD-11 TD-11N TD-11P  TDL-11 TDL-11N TDL-11P  TA-11N TA-11P TA-22  Ø32~Ø40 Only	1 1PC 2 2PCS

Construcción Interna


Ø12~Ø25



Ø32~Ø100

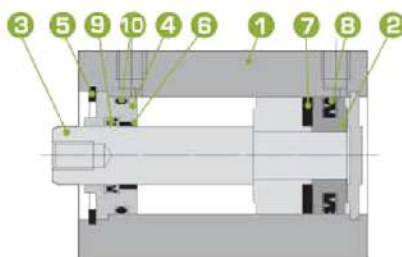

Extremo de varilla, rosca macho



Lista de partes

NO.	Descripción	Material
1	Alojamiento	Aleación de aluminio
2	Pistón	Aleación de aluminio
3	Vástago de émbolo	Acero inoxidable
		Acero carbono
4	Cubierta frontal	Aleación de rodamiento de aluminio
5	Anillo de retención	Acero carbono
6	Arbusto	Cojinete
7	Imán	Caucho sintético
8	Sello de pistón	NBR
9	Cubierta frontal	NBR
10	Sello cubierta final	NBR

Lista de sellos

Descripción	8	9	10
CALIBRE	Sello de pistón	Cubierta frontal	Sello de la cubierta final
Ø12	APA12	DYR06K	SM10
Ø16	APA16	DYR08K	SM14
Ø20	APA20	DYR10SK	SM18
Ø25	APA25	DYR12	SM22
Ø32	APA32	DYR16	SM28
Ø40	APA40	EM1620	SM36
Ø50	APA50	EM2025	SM46
Ø63	APA63	EM2025	SM60
Ø80	APA80	COR25	SM75
Ø100	APA100	DRP30	SM95